


$\phi (d)$	ID tolerance	Concentr. (C)
0.230	+0.010 / -0	<0.010
0.340	+0.010 / -0	<0.010
0.450	+0.015 / -0	<0.020
0.680	+0.015 / -0	<0.020
0.870	+0.020 / -0	<0.020

- Insert inside diameter (d) into part number. Example HP905-230-A31
 - Please specify ID size when ordering (available range 230um to 1200um)

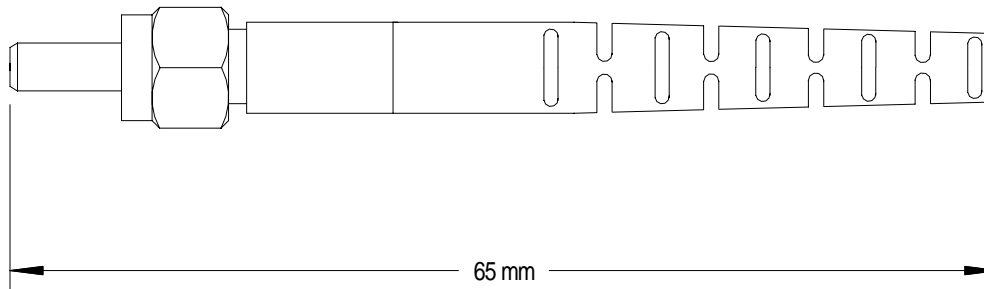

Notes:

- Fiber centering sleeve inside diameter is (d)
- Secure optical fiber inside fiber centering sleeve with epoxy

THIS DRAWING OR SPECIFICATION IS CONFIDENTIAL AND PROPRIETARY TO KIENTEC SYSTEMS, INC. AND MAY NOT BE REPRODUCED, OR DISCLOSED TO OTHERS WITHOUT THE WRITTEN CONSENT OF KIENTEC SYSTEMS, INC.

List of Materials:	
COMPONENT:	MATERIAL:
1 Connector	Stainless Steel / Brass
2 Centering Sleeve	Brass
3 Dust Cover	Vinyl, Black
4 Strain Relief	Thermoplastic, Black

Kientec Systems, Inc.

Stuart, FL 34994

High Power SMA 905

SIZE	DRAWN BY: C.A.K	DWG NO.	HP905-H-xxx-A31	REV
	DATE: 3/1/12			
SCALE	2:1	SHEET	1 of 1	