

The DIN 47256 (LSA) connectors are precision machined and feature a spring loaded floating zirconia ferrule. This compact and unique connector offers great reliability and superior performance.

The connector is available in singlemode and multimode ferrules, and with a variety of cable boots.



**Features:**

- Compatible with DIN 47256
- Compact design
- High quality, free floating ceramic ferrule
- Low insertion loss and backreflection


**Applications:**

- Active device termination
- Test equipments
- Telecom networks
- Industrial
- Medical & military

**Specifications:**

		Multimode	SM-PC	SM-APC
Insertion Loss	dB	0.25	0.20	0.20
Return Loss	dB	-	-55	-65
Repeatability 500 cycles	dB		<0.1	
Max.Tensile Strength of Cable	N		120	
Temperature Range	Celsius		-40°C to +85°C	

**Ordering Information:**

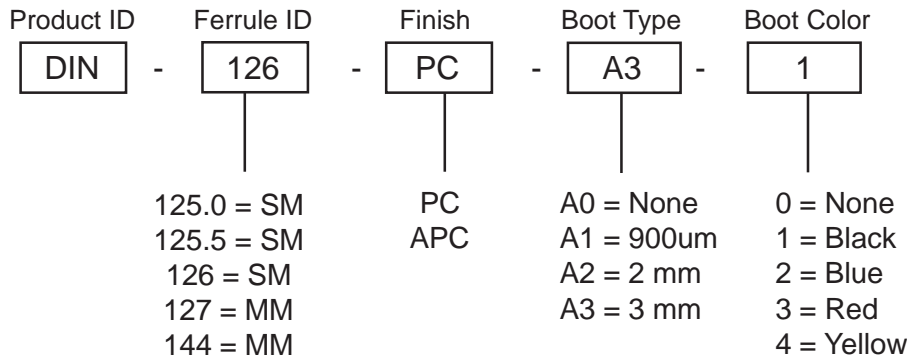

\* Custom Ferrule ID's are available upon request.